




VISU-LOK® BLIND BOLT INSTALLATION

MR550 Pneumatic Right Angle Tool

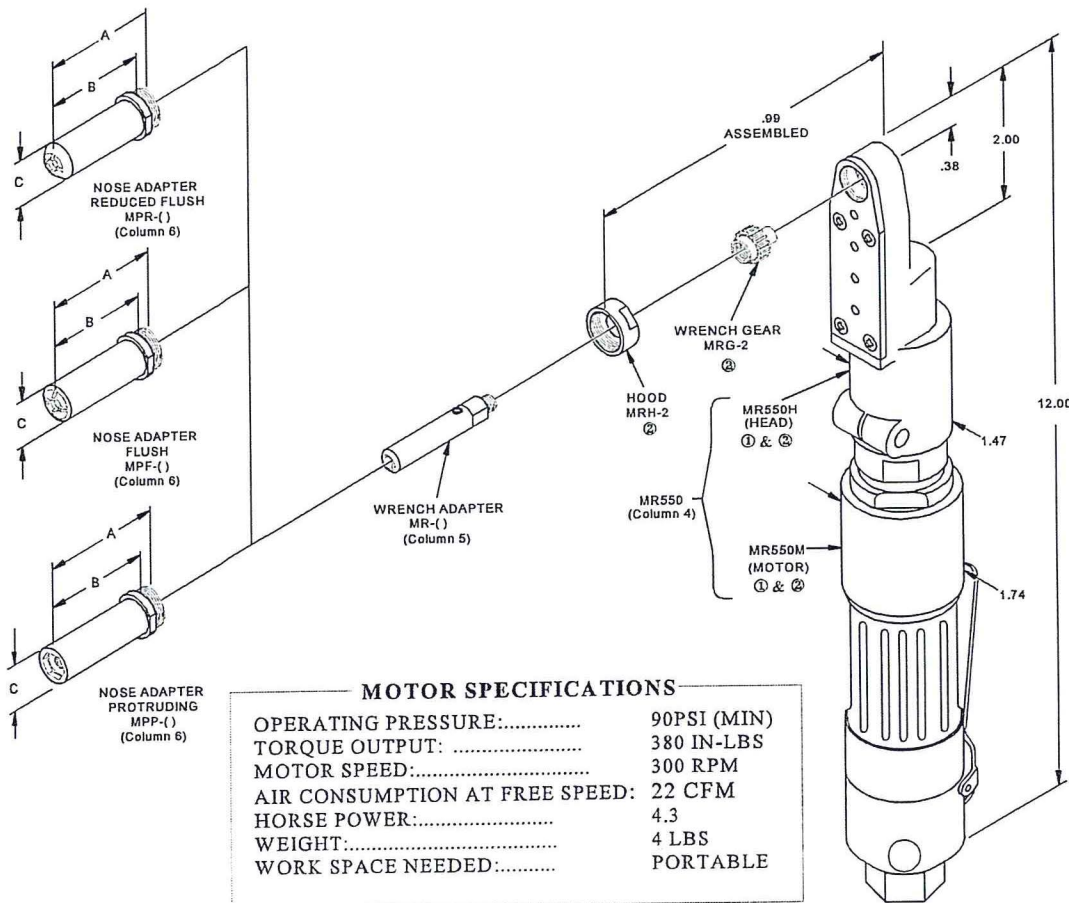

**MOTOR SPECIFICATIONS**

OPERATING PRESSURE:.....	90PSI (MIN)
TORQUE OUTPUT: .....	380 IN-LBS
MOTOR SPEED:.....	300 RPM
AIR CONSUMPTION AT FREE SPEED:.....	22 CFM
HORSE POWER:.....	4.3
WEIGHT:.....	4 LBS
WORK SPACE NEEDED:.....	PORTABLE

1	2	3	4	5	6	7	8	9			
BASIC DIA.	TYPICAL PART NUMBER	FASTENER HEAD STYLE	COMPLETE PNEUMATIC ASSEMBLY	PNEUMATIC MOTOR ASSEMBLY	WRENCH ADAPTER	NOSE ADAPTER	A (REF)	B (REF)	C (REF)		
5/32 (-5)	PLT110	100° FLUSH	MR550F-5AA	MR550 ①	MR-05	MPF-05	1.30	1.18	.56		
	PLT1058	100° SHEAR	MR550R-5AA			MPR-05	1.30	1.18			
	PLT210	HEX	MR550P-5AA			MPP-05	1.37	1.25			
	PLT130	MILLABLE	MR550A-5AA			MPA-05	1.34	1.22			
3/16 (-6)	PLT110	100° FLUSH	MR550F-6AA		MR550 ①	MR-06	MPF-06	1.30	1.18	.56	
	PLT1058	100° SHEAR	MR550R-6AA				MPR-06	1.30	1.18		
	PLT210	HEX	MR550P-6AA				MPP-06	1.37	1.25		
	PLT130	MILLABLE	MR550A-6AA				MPA-06	1.34	1.22		
1/4 (-8)	PLT110	100° FLUSH	MR550F-8AA			MR550 ①	MR-08	MPF-08	1.30	1.18	.56
	PLT1058	100° SHEAR	MR550R-8AA					MPR-08	1.30	1.18	
	PLT210	HEX	MR550P-8AA					MPP-08	1.37	1.25	
	PLT130	MILLABLE	MR550A-8AA					MPA-08	1.34	1.22	

① See motor breakdown for spare parts list and assembly.  
 ② Included with MR550 pneumatic motor assembly (column 4).

The complete pneumatic assembly (column 3) includes the pneumatic motor assembly (column 4), the appropriate wrench adapter (column 5) and the appropriate nose adapter (column 6).