




VISU-LOK® BLIND BOLT INSTALLATION

MP550 Pneumatic Pistol

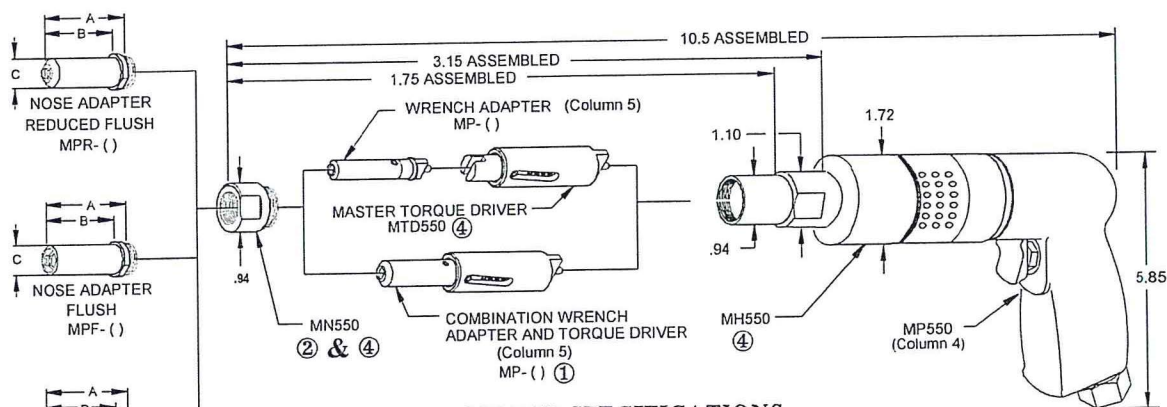

MOTOR SPECIFICATIONS

OPERATING PRESSURE:..... 90 PSI (MIN)
 TORQUE OUTPUT: 380 IN-LBS
 MOTOR SPEED:..... 300 RPM
 AIR CONSUMPTION AT FREE SPEED: 22 CFM
 HORSE POWER:..... 4.3
 WEIGHT:..... 4 LBS
 WORK SPACE NEEDED:..... PORTABLE

Column 6

1	2	3	4	5	6	7	8	9	
BASIC DIA.	TYPICAL PART NUMBER	FASTENER HEAD STYLE	COMPLETE PNEUMATIC ASSEMBLY	PNEUMATIC MOTOR ASSEMBLY	WRENCH ADAPTER	NOSE ADAPTER	A (REF)	B (REF)	C (REF)
5/32 (-5)	PLT110	100° FLUSH	MP550F-5AA	MP550	MP-05	MPF-05	1.30	1.18	.56
	PLT1058	100° SHEAR	MP550R-5AA			MPP-05	1.30	1.18	
	PLT210	HEX	MP550P-5AA			MPA-05	1.37	1.25	
	PLT130	MILLABLE	MP550A-5AA			MPA-05	1.34	1.22	
3/16 (-6)	PLT110	100° FLUSH	MP550F-6AA		MP-06	MPF-06	1.30	1.18	
	PLT1058	100° SHEAR	MP550R-6AA			MPP-06	1.30	1.18	
	PLT210	HEX	MP550P-6AA			MPP-06	1.37	1.25	
	PLT130	MILLABLE	MP550A-6AA			MPP-06	1.34	1.22	
1/4 (-8)	PLT110	100° FLUSH	MP550F-8AA		MP-08	MPF-08	1.30	1.18	
	PLT1058	100° SHEAR	MP550R-8AA			MPP-08	1.30	1.18	
	PLT210	HEX	MP550P-8AA			MPP-08	1.37	1.25	
	PLT130	MILLABLE	MP550A-8AA			MPP-08	1.34	1.22	
5/16 (-10)	PLT110	100° FLUSH	MP550F-10AA		MP-10	MPF-10	1.30	1.18	
	PLT1058	100° SHEAR	MP550R-10AA			MPP-10	1.30	1.18	
	PLT210	HEX	MP550P-10AA			MPP-10	1.37	1.25	
3/8 (-12)	PLT110	100° FLUSH	MP550F-12AA		MP-12 ①	MPF-12 ②	1.48	1.32	
	PLT1058	100° SHEAR	MP550R-12AA	MPP-12 ②		1.48	1.32		
	PLT210	HEX	MP550P-12AA	MPP-12 ②		1.48	1.32		

- ① Combination wrench adapter and torque driver requires removal of master torque driver (MTD550) supplied with the tool.
- ② Larger male thread on nose adapter requires removal of aluminum nut (MN550) supplied with the tool.
- ③ See Motor Breakdown section for spare parts and assembly.
- ④ Included with MP550 pneumatic motor assembly (Column 4).

The complete pneumatic assembly (column 3) includes the pneumatic motor assembly (column 4), the appropriate wrench adapter (column 5) and the appropriate nose adapter (column 6).