



# Buy Any ANGLE DRILL and Receive 20% OFF Standard Discount

## MINATURE ANGLE DRILLS



1AML1451



1AM1541



SDR10AH35



1AM1551

CE

- Non-Reversible
- Lever Start
- 45° or 90° Miniature Angle Heads

Model Number	Free Speed	Weight		Length		Side To Center		Maximum Air Consumption		
	rpm	lb	kg	in	mm	in	mm	cfm	l/s	
<b>45° Angle Head – 0.33 hp (0.25 kW) – 1/4"-28 Internal Thread Spindle</b>										
1AM1441	2200	1.5	0.7	10.2	259	0.3	8	12	6	
1AM1541	2800	1.5	0.7	10.2	259	0.3	8	12	6	
1AML1541 (with Lever Lock)	2800	1.5	0.7	10.2	259	0.3	8	12	6	
<b>90° Angle Head – 0.33 hp (0.25 kW) – 1/4"-28 Internal Thread Spindle</b>										
1AM1151	800	1.8	0.80	11.5	292	0.3	8	12	6	
1AM1451	2200	1.5	0.7	9.7	246	0.3	8	12	6	
1AML1451 (with Lever Lock)	2200	1.5	0.7	9.7	246	0.3	8	12	6	
1AM1551	2800	1.5	0.7	9.7	246	0.3	8	12	6	
1AML1551 (with Lever Lock)	2800	1.5	0.7	9.7	246	0.3	8	12	6	
<b>90° Angle Head – 0.33 hp (0.25 kW) – 9/32"-40 Internal Thread Spindle</b>										
1AM1452	2200	1.5	0.7	9.7	246	0.3	8	12	6	
1AM1552	2800	1.5	0.7	9.7	246	0.3	8	12	6	
<b>90° Angle Head – 1 hp (0.75 kW) – 1/4"-28 Internal Thread Spindle</b>										
SDR10AH35	3500	2.4	1.09	11.4	290	0.8	20	30	14	

Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

©2017 SIOUX SMP-ON POWER TOOLS, INC.


Offer Valid — January 4<sup>th</sup> – March 26<sup>th</sup>, 2021



ENGINEERED TO BE  
FEARLESS®



## LARGE ANGLE DRILLS

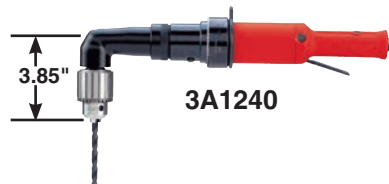

CE

- Reversible and Non-Reversible
- Lever Start
- Heads can be rotated 360°
- Rear or Side Exhaust

Model Number	Chuck Capacity		Free Speed rpm	Weight		Length		Side To Center		Maximum Air Consumption		Spindle Thread
	in	mm		lb	kg	in	mm	in	mm	cfm	l/s	
<b>0.80 hp (0.60 kW) – Reversible – Side Exhaust<sup>1</sup></b>												
3A2140 <sup>1</sup>	1/2	13	300	6.9	3.10	15.5	394	0.8	19	33	16	1/2"-20
3A2240 <sup>1</sup>	1/2	13	480	6.9	3.10	15.5	394	0.8	19	33	16	1/2"-20
3A2340 <sup>1</sup>	1/2	13	700	6.9	3.10	15.5	394	0.8	19	33	16	1/2"-20
3A2430 <sup>1</sup>	3/8	10	1000	6.3	2.90	15.4	391	0.8	19	33	16	1/2"-20
<b>1 hp (0.75 kW) – Reversible</b>												
SDR10A3R3	3/8	10	300	3.3	1.50	12.0	305	0.8	19	30	14	3/8"-24
SDR10A3R4	1/2	13	300	3.7	1.65	12.0	305	0.8	19	30	14	3/8"-24
SDR10A6R3	3/8	10	600	3.3	1.50	12.0	305	0.8	19	30	14	3/8"-24
SDR10A6R4	1/2	13	600	3.7	1.65	12.0	305	0.8	19	30	14	3/8"-24
SDR10A10R3	3/8	10	1000	3.3	1.50	12.0	305	0.8	19	30	14	3/8"-24
SDR10A10R4	1/2	13	1000	3.7	1.65	12.0	305	0.8	19	30	14	3/8"-24
SDR10A16R2	1/4	6	1600	3.2	1.40	12.0	305	0.8	19	30	14	3/8"-24
SDR10A16R3	3/8	10	1600	3.3	1.50	12.0	305	0.8	19	30	14	3/8"-24
SDR10A20R2	1/4	6	2000	2.9	1.30	11.0	280	0.8	19	30	14	3/8"-24
SDR10A20R3	3/8	10	2000	3.0	1.35	11.0	280	0.8	19	30	14	3/8"-24
<b>1 hp (0.75 kW) – Non-Reversible</b>												
SDR10A4N3	3/8	10	400	3.3	1.50	11.2	285	0.8	19	30	14	3/8"-24
SDR10A4N4	1/2	13	400	3.7	1.65	11.2	285	0.8	19	30	14	3/8"-24
SDR10A10N3	3/8	10	1000	3.3	1.50	11.2	285	0.8	19	30	14	3/8"-24
SDR10A10N4	1/2	13	1000	3.7	1.65	11.2	285	0.8	19	30	14	3/8"-24
SDR10A13N2	1/4	6	1300	3.2	1.40	11.2	285	0.8	19	30	14	3/8"-24
SDR10A13N3	3/8	10	1300	3.3	1.50	11.2	285	0.8	19	30	14	3/8"-24
SDR10A22N2	1/4	6	2200	2.9	1.30	10.2	260	0.8	19	30	14	3/8"-24
SDR10A22N3	3/8	10	2200	3.0	1.35	10.2	260	0.8	19	30	14	3/8"-24
SDR10A30N2	1/4	6	3000	2.9	1.30	10.2	260	0.8	19	30	14	3/8"-24
<b>1 hp (0.75 kW) – Non-reversible – Side Exhaust<sup>1</sup></b>												
3A1140 <sup>1</sup>	1/2	13	360	6.5	2.90	15.1	384	0.8	19	33	16	1/2"-20
3A1240 <sup>1</sup>	1/2	13	600	6.5	2.90	15.1	384	0.8	19	33	16	1/2"-20
3A1530	3/8	10	1800	6.5	2.90	15.1	384	0.8	19	33	16	1/2"-20

<sup>1</sup> Not CE Certified

Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Offer Valid — January 4<sup>th</sup> – March 26<sup>th</sup>, 2021